

600W, 6.8 - 550V Transient Voltage Suppressors

Features

- Very fast response time
- Glass passivated junction
- Excellent clamping capability
- Available in unidirectional and bidirectional
- Plastic package has underwriters Laboratory Flammability Classification 94V-0
- 600 W peak pulse power capability with a 10/1000 μ s waveform



DO-15(DO-204AC)

Applications

- SMPS
- Adapters
- Monitor

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Peak power dissipation with a 10/1000us waveform	P _{PPM}	600	W
Peak pulse current with a 10/1000us waveform	I _{PPM}	See Next Table	A
Power dissipation, on infinite heat sink at T _L =75°C	P _D	5	W
Peak forward surge current, 8.3ms single half-sine wave	I _{FSM}	100	A
Typical Thermal Resistance , Junction to Ambient	R _{θJA}	60	°C/W
Typical Thermal Resistance , Junction to Case	R _{θJC}	15	°C/W
Typical Thermal Resistance , Junction to Lead	R _{θJL}	12	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C



P6KE6.8 thru P6KE550CA

GOOD-ARK Electronics

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Breakdown Voltage VBR (Volts)		Test Current I _T (mA)	Stand off Voltage V _{WM} (Volts)	Maximum reverse leakage at V _{WM} I _D (μA)	Maximum Peak Pulse Current I _{ppM} (A)	Maximum Clamping Voltage at I _{ppM} V _C (Volts)
		Min	Max					
P6KE6.8	P6KE6.8C	6.12	7.48	10.0	5.50	1000	55.6	10.8
P6KE6.8A	P6KE6.8CA	6.45	7.14	10.0	5.80	1000	57.1	10.5
P6KE7.5	P6KE7.5C	6.75	8.25	10.0	6.05	500	51.3	11.7
P6KE7.5A	P6KE7.5CA	7.13	7.88	10.0	6.40	500	53.7	11.3
P6KE8.2	P6KE8.2C	7.38	9.02	10.0	6.63	200	48.0	12.5
P6KE8.2A	P6KE8.2CA	7.79	8.61	10.0	7.02	200	49.6	12.1
P6KE9.1	P6KE9.1C	8.19	10.00	1.0	7.37	50	43.5	13.8
P6KE9.1A	P6KE9.1CA	8.65	9.55	1.0	7.78	50	44.8	13.4
P6KE10	P6KE10C	9.0	11.0	1.0	8.10	10	40.0	15.0
P6KE10A	P6KE10CA	9.5	10.5	1.0	8.55	10	41.4	14.5
P6KE11	P6KE11C	9.9	12.1	1.0	8.92	5.0	37.0	16.2
P6KE11A	P6KE11CA	10.5	11.6	1.0	9.40	5.0	38.5	15.6
P6KE12	P6KE12C	10.8	13.2	1.0	9.72	1.0	34.7	17.3
P6KE12A	P6KE12CA	11.4	12.6	1.0	10.2	1.0	35.9	16.7
P6KE13	P6KE13C	11.7	14.3	1.0	10.5	1.0	31.6	19.0
P6KE13A	P6KE13CA	12.4	13.7	1.0	11.1	1.0	33.0	18.2
P6KE15	P6KE15C	13.5	16.5	1.0	12.1	1.0	27.3	22.0
P6KE15A	P6KE15CA	14.3	15.8	1.0	12.8	1.0	28.3	21.2
P6KE16	P6KE16C	14.4	17.6	1.0	12.9	1.0	25.5	23.5
P6KE16A	P6KE16CA	15.2	16.8	1.0	13.6	1.0	26.7	22.5
P6KE18	P6KE18C	16.2	19.8	1.0	14.5	1.0	22.6	26.5
P6KE18A	P6KE18CA	17.1	18.9	1.0	15.3	1.0	23.8	25.2
P6KE20	P6KE20C	18.0	22.0	1.0	16.2	1.0	20.6	29.1
P6KE20A	P6KE20CA	19.0	21.0	1.0	17.1	1.0	21.7	27.7
P6KE22	P6KE22C	19.8	24.2	1.0	17.8	1.0	18.8	31.9
P6KE22A	P6KE22CA	20.9	23.1	1.0	18.8	1.0	19.6	30.6
P6KE24	P6KE24C	21.6	26.4	1.0	19.4	1.0	17.3	34.7
P6KE24A	P6KE24CA	22.8	25.2	1.0	20.5	1.0	18.1	33.2
P6KE27	P6KE27C	24.3	29.7	1.0	21.8	1.0	15.3	39.1
P6KE27A	P6KE27CA	25.7	28.4	1.0	23.1	1.0	16.0	37.5
P6KE30	P6KE30C	27.0	33.0	1.0	24.3	1.0	13.8	43.5
P6KE30A	P6KE30CA	28.5	31.5	1.0	25.6	1.0	14.5	41.4
P6KE33	P6KE33C	29.7	36.3	1.0	26.8	1.0	12.6	47.7
P6KE33A	P6KE33CA	31.4	34.7	1.0	28.2	1.0	13.1	45.7



Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Breakdown Voltage VBR (Volts)		Test Current I _T (mA)	Stand off Voltage V _{WM} (Volts)	Maximum reverse leakage at V _{WM} I _D (μA)	Maximum Peak Pulse Current I _{ppM} (A)	Maximum Clamping Voltage at I _{ppM} V _C (Volts)
		Min	Max					
P6KE36	P6KE36C	32.4	39.6	1.0	29.1	1.0	11.5	52.0
P6KE36A	P6KE36CA	34.2	37.8	1.0	30.8	1.0	12.0	49.9
P6KE39	P6KE39C	35.1	42.9	1.0	31.6	1.0	10.6	56.4
P6KE39A	P6KE39CA	37.1	41.0	1.0	33.3	1.0	11.1	53.9
P6KE43	P6KE43C	38.7	47.3	1.0	34.8	1.0	9.7	61.9
P6KE43A	P6KE43CA	40.9	45.2	1.0	36.8	1.0	10.1	59.3
P6KE47	P6KE47C	42.3	51.7	1.0	38.1	1.0	8.8	67.8
P6KE47A	P6KE47CA	44.7	49.4	1.0	40.2	1.0	9.3	64.8
P6KE51	P6KE51C	45.9	56.1	1.0	41.3	1.0	8.2	73.5
P6KE51A	P6KE51CA	48.5	53.6	1.0	43.6	1.0	8.6	70.1
P6KE56	P6KE56C	50.4	61.6	1.0	45.4	1.0	7.5	80.5
P6KE56A	P6KE56CA	53.2	58.8	1.0	47.8	1.0	7.8	77.0
P6KE62	P6KE62C	55.8	68.2	1.0	50.2	1.0	6.7	89.0
P6KE62A	P6KE62CA	58.9	65.1	1.0	53.0	1.0	7.1	85.0
P6KE68	P6KE68C	61.2	74.8	1.0	55.1	1.0	6.1	98.0
P6KE68A	P6KE68CA	64.6	71.4	1.0	58.1	1.0	6.5	92.0
P6KE75	P6KE75C	67.5	82.5	1.0	60.7	1.0	5.6	108
P6KE75A	P6KE75CA	71.3	78.8	1.0	64.1	1.0	5.8	103
P6KE82	P6KE82C	73.8	90.2	1.0	66.4	1.0	5.1	118
P6KE82A	P6KE82CA	77.9	86.1	1.0	70.1	1.0	5.3	113
P6KE91	P6KE91C	81.9	100	1.0	73.7	1.0	4.6	131
P6KE91A	P6KE91CA	86.5	95.5	1.0	77.8	1.0	4.8	125
P6KE100	P6KE100C	90	110	1.0	81.0	1.0	4.2	144
P6KE100A	P6KE100CA	95	105	1.0	85.5	1.0	4.4	137
P6KE110	P6KE110C	99	121	1.0	89.2	1.0	3.8	158
P6KE110A	P6KE110CA	105	116	1.0	94.0	1.0	3.9	152
P6KE120	P6KE120C	108	132	1.0	97.2	1.0	3.5	173
P6KE120A	P6KE120CA	114	126	1.0	102	1.0	3.6	165
P6KE130	P6KE130C	117	143	1.0	105	1.0	3.2	187
P6KE130A	P6KE130CA	124	137	1.0	111	1.0	3.4	179
P6KE150	P6KE150C	135	165	1.0	121	1.0	2.8	215
P6KE150A	P6KE150CA	143	158	1.0	128	1.0	2.9	207
P6KE160	P6KE160C	144	176	1.0	130	1.0	2.6	230
P6KE160A	P6KE160CA	152	168	1.0	136	1.0	2.7	219



Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Breakdown Voltage VBR (Volts)		Test Current I _T (mA)	Stand off Voltage V _{WM} (Volts)	Maximum reverse leakage at V _{WM} I _D (μA)	Maximum Peak Pulse Current I _{ppM} (A)	Maximum Clamping Voltage at I _{ppM} V _C (Volts)
		Min	Max					
P6KE170	P6KE170C	153	187	1.0	138	1.0	2.5	244
P6KE170A	P6KE170CA	162	179	1.0	145	1.0	2.6	234
P6KE180	P6KE180C	162	198	1.0	146	1.0	2.3	258
P6KE180A	P6KE180CA	171	189	1.0	154	1.0	2.4	246
P6KE200	P6KE200C	180	220	1.0	162	1.0	2.1	287
P6KE200A	P6KE200CA	190	210	1.0	171	1.0	2.2	274
P6KE220	P6KE220C	198	242	1.0	175	1.0	1.7	344
P6KE220A	P6KE220CA	209	231	1.0	185	1.0	1.8	328
P6KE250	P6KE250C	225	275	1.0	202	1.0	1.7	360
P6KE250A	P6KE250CA	237	263	1.0	214	1.0	1.7	344
P6KE300	P6KE300C	270	330	1.0	243	1.0	1.4	430
P6KE300A	P6KE300CA	285	315	1.0	256	1.0	1.4	414
P6KE350	P6KE350C	315	385	1.0	284	1.0	1.2	504
P6KE350A	P6KE350CA	332	368	1.0	300	1.0	1.2	482
P6KE400	P6KE400C	360	440	1.0	324	1.0	1.0	574
P6KE400A	P6KE400CA	380	420	1.0	342	1.0	1.1	548
P6KE440	P6KE440C	396	484	1.0	356	1.0	0.95	631
P6KE440A	P6KE440CA	418	462	1.0	376	1.0	1.0	602
P6KE480A	P6KE480CA	456	504	1.0	408	1.0	0.9	658
P6KE510A	P6KE510CA	485	535	1.0	434	1.0	0.9	698
P6KE530A	P6KE530CA	503.5	557	1.0	450	1.0	0.8	725
P6KE540A	P6KE540CA	513	567	1.0	459	1.0	0.8	740
P6KE550A	P6KE550CA	522.5	577.5	1.0	467	1.0	0.8	760

Note:

- Valid provided that leads at a distance of 9.5 mm from case are kept at ambient temperature.

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG.1-Peak Pulse Power Rating Curve

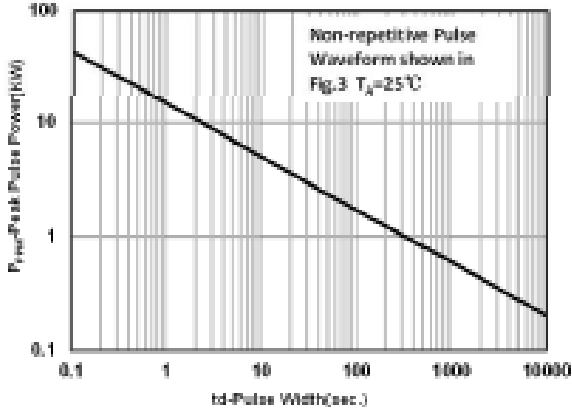


FIG.2-Pulse Derating Curve

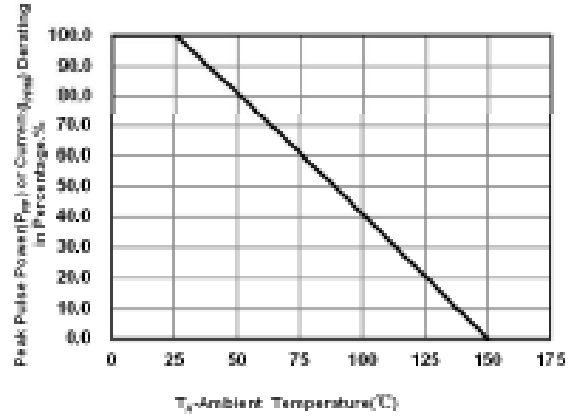


FIG.3-Pulse Waveform

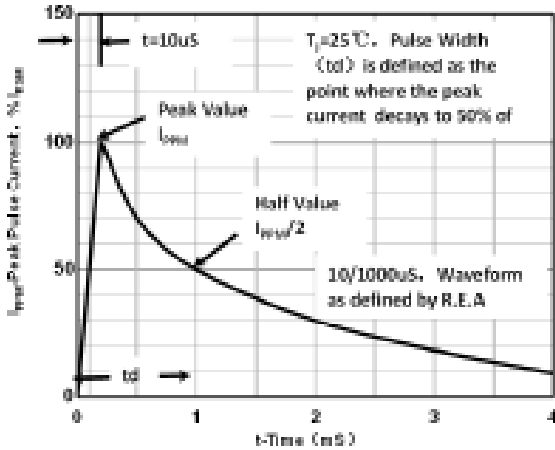


FIG.4-Typ Junction Capacitance Uni-Directional

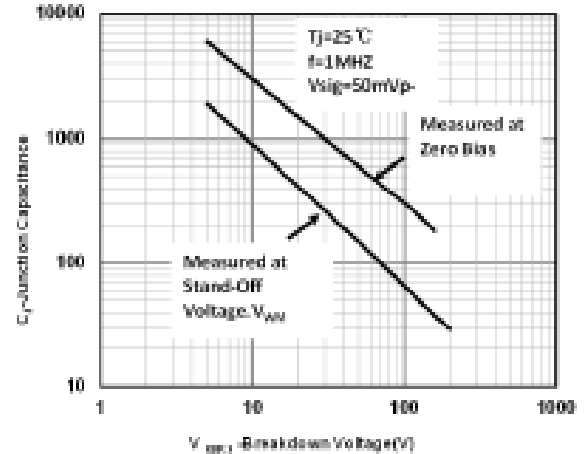


FIG5-Steady State Power Derating Curve


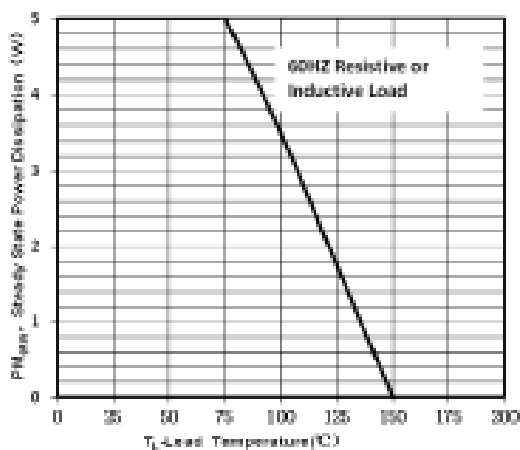



FIG6-Max.Non-Repetitive Forward Surge Current Uni-Directional Only

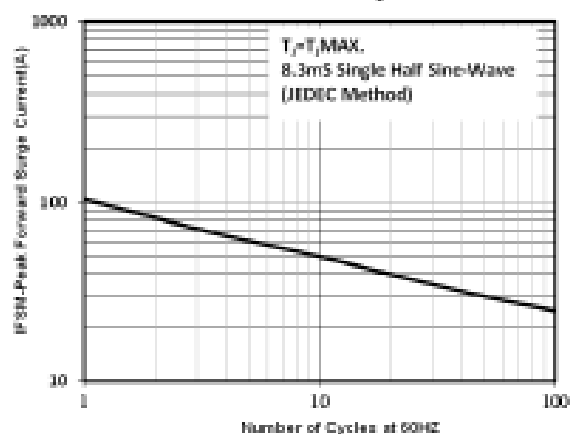

Package Outline Dimensions

in inches (millimeters)

DO-15(DO-204AC)

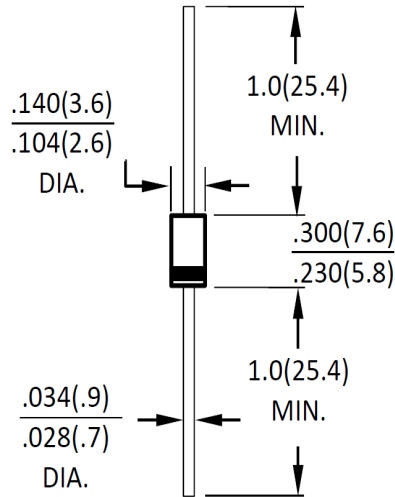

Dimensions in inches and (millimeters)

Revision History

Document Version	Date of release	Description of changes
Rev.A	2021.06.15	Released Datasheet
Rev.B	2023.11.28	Modify document format

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Suzhou Good-Ark product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Suzhou Good-Ark Electronics Co., Ltd. or a third party.

Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Suzhou Good-Ark Electronics Co., Ltd. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized Suzhou Good-Ark Electronics Co., Ltd. for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Suzhou Good-Ark Electronics Co., Ltd. by various means, including our website home page.

(<http://www.goodark.com>)

When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, Please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Suzhou Good-Ark Electronics Co., Ltd. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Suzhou Good-Ark Electronics Co., Ltd. is necessary to reprint or reproduce in whole or in part these materials.

Please contact Suzhou Good-Ark Electronics Co., Ltd. or an authorized distributor for further details on these materials or the products contained herein.